


# OLYMPIAN™

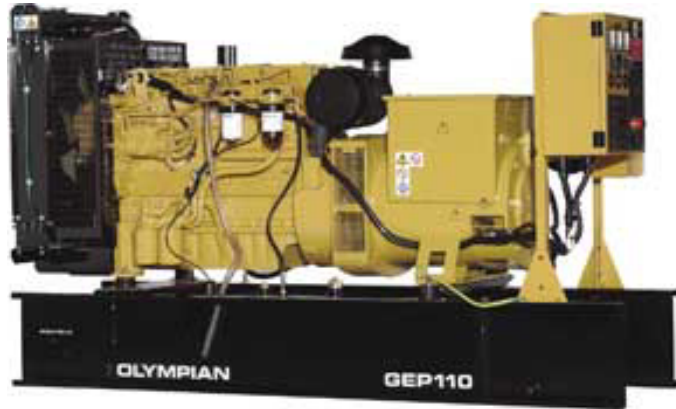

## GEP110

*Diesel Generator Set  
Exclusively from your Caterpillar® dealer*

### Output Ratings

Generating Set Model	Prime*	Standby*
380-415V, 50Hz	100.0 kVA 80.0 kW	110.0 kVA 88.0 kW
480V, 60 Hz	113.0 kVA 90.4 kW	125.0 kVA 100.0 kW

\* Refer to ratings definitions on page 4.  
Ratings at 0.8 power factor.

### Technical Data

Engine Make & Model:	Perkins 1006TG2A	
Alternator Model:	LL3014B	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB / 3 Pole MCCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	230 (60.8)	
Fuel Consumption, Prime: l/hr (US gal/hr)	22.8 (6.0)	26.4 (7.0)
Fuel Consumption, Standby : l/hr (US gal/hr)	25.4 (6.7)	29.2 (7.7)

# Engine Technical Data

Physical Data	
Manufacturer:	Perkins
Model:	1006TG2A
No. of Cylinders/Alignment:	6 / In Line
Cycle:	4 Stroke
Induction:	Turbocharged
Cooling Method:	Water
Governing Type:	Mechanical
Governing Class:	ISO 8528 G2
Compression Ratio:	16.0:1
Displacement: l (cu.in)	6.0 (365.5)
Bore/Stroke: mm (in)	100.0 (3.9)/127.0 (5.0)
Moment of Inertia: kg m <sup>2</sup> (lb. in <sup>2</sup> )	1.61 (5502)
Engine Electrical System:	
-Voltage/Ground:	12/Negative
-Battery Charger Amps:	55
Weight: kg (lb) - Dry:	586 (1292)
- Wet:	623 (1373)

Air System	50 Hz	60 Hz
Air Filter Type:	Replaceable Element	
Combustion Air Flow:		
m <sup>3</sup> /min (cfm)	-Standby: 6.0 (212)	7.6 (268)
	-Prime: 5.7 (201)	7.2 (254)
Max. Combustion Air Intake		
Restriction: kPa (in H <sub>2</sub> O)	5.0 (20.1)	5.0 (20.1)
Radiator Cooling Air Flow:		
m <sup>3</sup> /min (cfm)	192.0 (6780)	244.0 (8617)
External Restriction to		
Cooling Air Flow: Pa (in H <sub>2</sub> O)	125 (0.5)	125 (0.5)

Cooling System	50 Hz	60 Hz
Cooling System Capacity:		
l (US gal)	27.7 (7.3)	27.7 (7.3)
Water Pump Type:	Centrifugal	
Heat Rejected to Water & Lube Oil: kW (Btu/min)		
-Standby:	69.8 (3969)	78.8 (4481)
-Prime:	62.6 (3560)	70.8 (4026)
Heat Radiation to Room: kW (Btu/min)		
-Standby:	48.3 (2747)	44.3 (2519)
-Prime:	39.3 (2235)	35.1 (1996)
Radiator Fan Load: kW (hp)	2.8 (3.8)	4.9 (6.6)
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Olympian dealer for power ratings at specific site conditions.		

Lubrication system	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	16.1 (4.3)
Oil Pan l (US gal):	13.1 (3.5)
Oil Type:	AP1CD 15W-40
Cooling Method:	Water

Performance	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	105.0 (141.0)	125.0 (168.0)
-Prime:	95.7 (128.0)	114.0 (153.0)
BMEP: kPa (psi)		
-Standby:	1404.0 (203.6)	1393.0 (202.0)
-Prime:	1279.0 (185.5)	1270.0 (184.2)
Regenerative Power: kW	12.6	16.2

Fuel System				
Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	25.4 (6.7)	22.8 (6.0)	16.9 (4.5)	11.9 (3.1)
60 Hz	29.2 (7.7)	26.4 (7.0)	20.1 (5.3)	14.7 (3.9)
Standby				
50 Hz	25.4 (6.7)	18.6 (4.9)	12.8 (3.4)	
60 Hz	29.2 (7.7)	22.1 (5.8)	15.8 (4.2)	
(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)				

Exhaust System	50 Hz	60 Hz
Silencer Type:	Level 1	
Silencer Noise Reduction	SD80 (1)	
Pressure Drop Across		
Silencer System: kPa (in Hg)	4.00 (1.181)	4.00 (1.181)
Silencer Noise Reduction		
Level: dB	18	18
Max. Allowable Back		
Pressure: kPa (in. Hg)	6.0 (1.8)	6.0 (1.8)
Exhaust Gas Flow:		
m <sup>3</sup> /min (cfm)	-Standby: 17.6 (622)	21.9 (773)
	-Prime: 16.1 (569)	19.5 (689)
Exhaust Gas Temperature: °C (°F)		
m <sup>3</sup> /min (cfm)	-Standby: 585 (1085)	581 (1077)
	-Prime: 550 (1023)	541 (1006)

## Alternator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V 230/115V 200/115V	380/220V 220/110V	220/127V	480/277V 240/139V	380/220V 220/110V	240/120V 208/120V	230/115V	440/254V 220/127V
<b>Motor Starting Capability* kVA</b>	187	176	160	208	206	136	160	149	177
<b>Short Circuit Capacity** %</b>	300	300	300	300	300	300	300	300	300
<b>Reactances: Per Unit</b>									
<b>Xd</b>	3.200	3.440	3.810	2.840	3.240	5.080	4.310	4.660	3.850
<b>X'd</b>	0.120	0.130	0.150	0.110	0.130	0.200	0.170	0.180	0.150
<b>X''d</b>	0.074	0.080	0.089	0.066	0.075	0.118	0.100	0.108	0.090

Reactances shown are applicable to standby ratings.

\* Based on 30% voltage dip. Improved motor starting capability is available with optional Permanent Magnet generator or AREP excitation.

\*\* With optional Permanent Magnet generator or AREP excitation.

## Alternator Technical Data

Physical Data	
<b>Manufacturer:</b>	OLYMPIAN
<b>Model:</b>	LL3014B
<b>No. of Bearings:</b>	1
<b>Insulation Class:</b>	H
<b>Winding Pitch - Code:</b>	2/3 - 6
<b>Wires:</b>	12
<b>Ingress Protection Rating:</b>	IP23
<b>Excitation System:</b>	SHUNT
<b>AVR Model:</b>	R250

Operating Data	
<b>Overspeed: RPM</b>	2250
<b>Voltage Regulation (steady state) (%):</b>	+/- 0.5
<b>Wave Form NEMA = TIF:</b>	50
<b>Wave Form IEC = THF:</b>	2.0%
<b>Total Harmonic Content LL/LN:</b>	4.0%
<b>Radio Interference:</b>	Suppression is in line with European Standard EN61000-6
<b>Radiant Heat: kW (Btu/min)</b>	
-50 Hz:	10.7 (608)
-60 Hz:	12.0 (682)

Consult your Olympian representative for more information

